

# 7-STAR<sup>★</sup>

**6-Port Fast Ethernet Switch 10/100Mbps  
4Port & 2 Uplink PoE Switch - 802.3AF**




# 7-STAR<sup>★</sup>

## **DESCRIPTION:**

The 4+2 port poe switch with 4 10/100 Mbps PoE Ports, and 2 10/100Mbps Uplink Port, The 4 POE ports can automatically detect and provide power for any connected 802.3af Powered Device(PD), such as VOIP phones, IP Cameras, All POE ports support the IEEE802.3af standard, with a maximum output of 15.4w each port.

## **Application Example:**

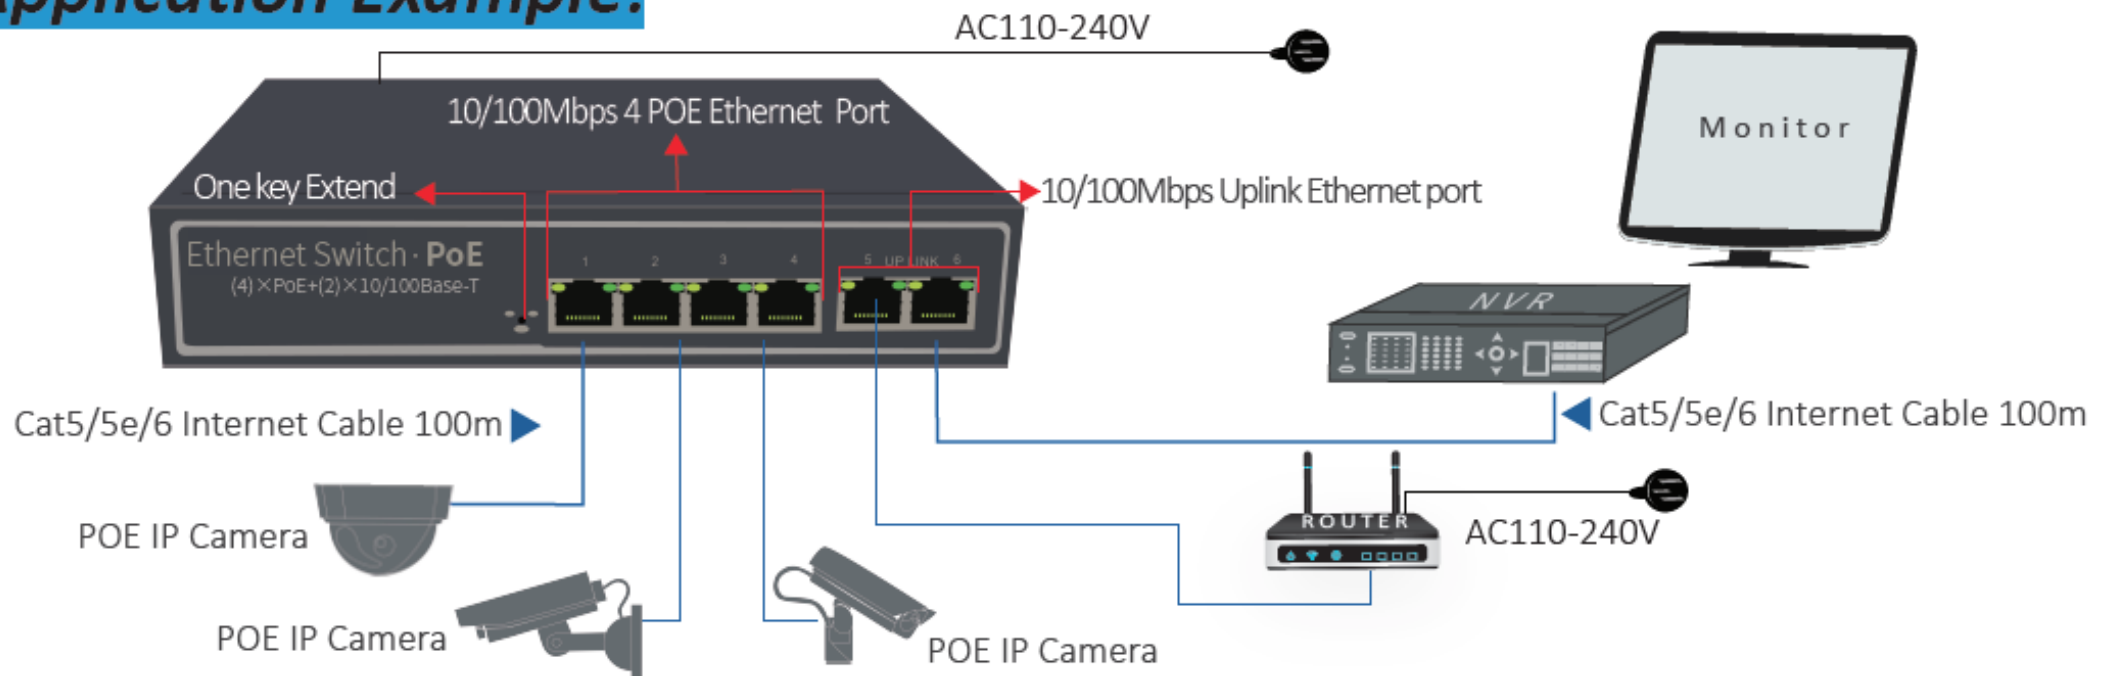

# 7-STAR<sup>★</sup>

## FEATURES:

- ◆ 6x 10/100Mbps auto-sensing RJ45 ports, 4x 10/100Mbps PoE ports, 2x uplink port;
- ◆ Unique Feature:one-key CCTV mode,which can restrain network storm,realize VLAN function and 1~4 downlink ports only able to communicate with uplink ports.The communication distance extends to 250 meters;
- ◆ Supports port auto-flip (Auto MDI/ MDIX);
- ◆ Built-in power supply;
- ◆ Maximum power of single PoE port: 15.4W;
- ◆ Maximum PoE power: 75W;
- ◆ Adopts store-and-forward architecture;
- ◆ IEEE 802.3af power on up to 4 ports;
- ◆ Fanless, natural cooling, small,compact and quiet design, suitable for desktop or wall;

## DIMENSION:



Item		Description	
Power	Power Adapter Voltage	AC 110V-240V	
	Consumption	75W	
Network Connector	Network Port	POE Ethernet Port	1~4 Port : 10/100Mbps
		Ethernet port	Uplink Port : 10/100Mbps
	Transmission Distance		1~4 Port : 100Mbps:0~100m; 10Mbps: 0~250m;
	Transmission Medium		Uplink Port : 0 ~ 100m Cat5/5e/6 standard network cable
Network Switch	Network Standard		IEEE802.3/802.3u, IEEE802.3x,IEEE802.1D
	Switching Capacity		1G
	Packet Forwarding		0.74Mpps
	MAC Table		2K
Power Over Ethernet	PoE Standard		IEEE 802.3af
	PoE Power Supply		End-Span(1/2+;3/6-)
	PoE Power		af=15.4W (every port)
LED Status Indicator	PoE Ethernet LED Indicator		Power: 1 red light indicates that the power normal work;
			POE: 4 yellow lights indicate that the POE is power on;
			Ethernet:6 green lights indicate that the Ethernet Link and Act;
Environmental	Working temperature		0℃~55℃
	Relative Humidity		20~95%
	Storage temperature		-20℃~70℃
Mechanical	Dimension (L×W×H)		201mm*120mm*41mm
	Color		Black
	Weight		609.2g
Stability	MTBF		>30000h