

7-STAR[★]


7-STAR[★]

10/100Mbps 24+2 Port 250W PoE Switch (Built-in Power Supply)

7-STAR[★]



Application Example:

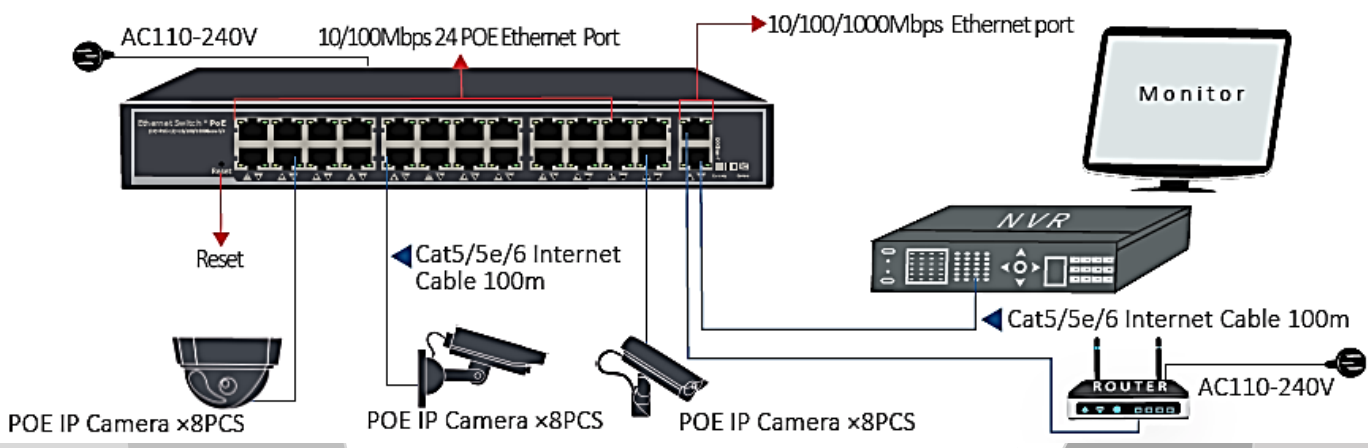

7-STAR[★]

7-STAR

7-STAR

DESCRIPTION:

The 24 port poe switch with 24ports supporting 10/100 Mbps,2 ports supporting 10/100/1000 Mbps,1port Gigabit SFP Auto-negotiation and Auto-MDI/MDIX,The 24POE ports can automatically detect and provide power for any connected 802.3af Powered Device(PD),such as VOIP phones,IP Cameras,
All POE ports support the IEE802.3af standard,with a maximum output of 15.4w each port.

FEATURES:

- ◆ 24x 10/100Mbps downlink PoE Ethernet Ports, 2x 10/100/1000Mbps uplink Ethernet Ports and 2x 1000Mbps uplink SFP Ports;
- ◆ Unique Feature:one-key CCTV mode,which can restrain network storm,realize VLAN function and 1~24 downlink ports only able to communicate with uplink ports. The communication distance extends to 250 meters;
- ◆ Supports port auto-flip (Auto MDI/ MDIX);
- ◆ Each of 24 ports all support IEEE802.3af;
- ◆ Maximum power per port: 15.4W;
- ◆ Maximum PoE power: 250W;
- ◆ Adopts store-and-forward architecture;

7-STAR


7-STAR

7-STAR[★]

Item		Description	
Power	Power Adapter Voltage	AC 110V-240V	
	Consumption	250W	
Network Connector	Network Port	POE Ethernet Port	1~24 Port : 10/100Mbps
		Ethernet port	Uplink Port : 10/100/1000Mbps
		SFP Port	SEP Port : 10/100/1000Mbps
		Transmission Distance	1~24 Port : 0 ~ 100m;10Mbps:0~250m;
			Uplink Port : 0 ~ 100m
			SFP: depends on the optical module
Transmission Medium	Cat5/5e/6 standard network cable		
Network Switch	Network Standard	IEEE802.3/802.3u,IEEE802.3x,IEEE802.1D	
	Switching Capacity	9.2G	
	Packet Forwarding	6.8448Mpps	
	MAC Table	2K	
Power Over Ethernet	PoE Standard	IEEE 802.3af	
	PoE Power Supply	End-Span(1/2+;3/6-)	
	PoE Power	af=15.4W(every port)	
LED Status Indicator	PoE Ethernet LED Indicator	Power: 1 red light indicates that the power normal work;	
		POE: 26 yellow lights indicate that the POE is power on;	
		Ethernet:28 green lights indicate that the Ethernet Link and Act;	
Environmental	Working temperature	0°C~55°C	
	Relative Humidity	20~95%	
	Storage temperature	-20°C~70°C	
Mechanical	Dimension (L×W×H)	285mm*180mm*44mm	
	Color	Black	
	Weight	1737g	
Stability	MTBF	>30000h	

7-STAR[★]

DIMENSION:

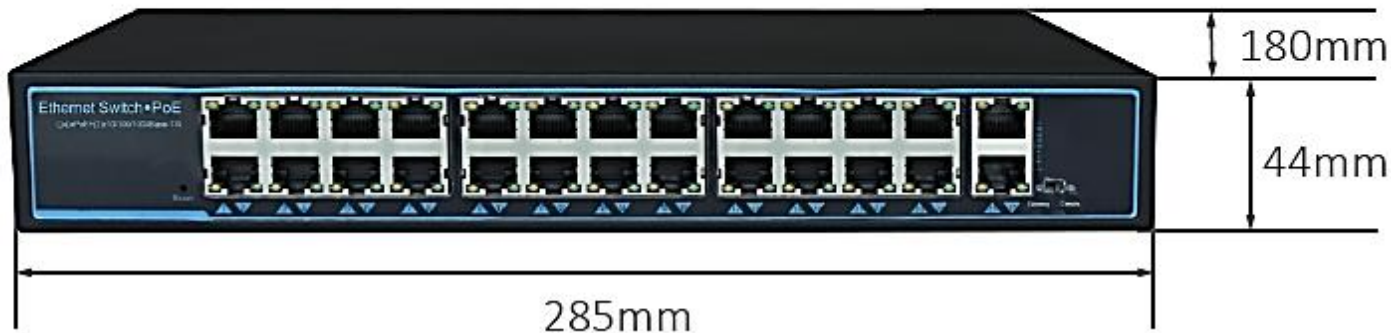

Application Example:

