

#### SINSENG COMPONENTS PTE LTD

10 Jalan Besar #01-11 Sim Lim Tower, Singapore 208787 Tel:6299 6868 Fax:6299 1919 Email:ss6868@singnet.com.sg www.sinseng.com.sg

Mon-Sat:9.30am-6.30pm Sunday:11.30pm-4.30pm



VStarcam 1080p Outdoor 2 LED Floodlight IP Camera Wifi Camera IP66 **Waterproof PIR Motion Detection CCTV Surveillance Security Camera** 


















## Working principle

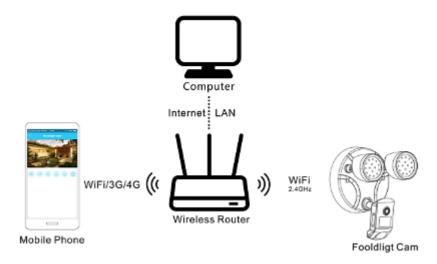



### Outside Security Special Experience

The first defense line for family security

When Floodlight Cam detect human body moving the siren alarm and send it to mobile APP















# Waterproof IP66

Suit for all weathers




Support IR-CUT

Give you an extraordinary visual experience The color is not biased during the day and is clear at night






Watch your home at all times to keep your property safe

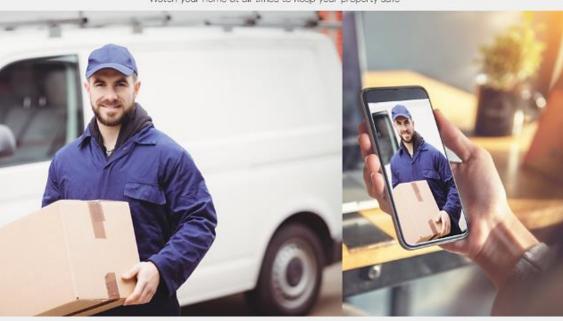

Brightness Adjustment

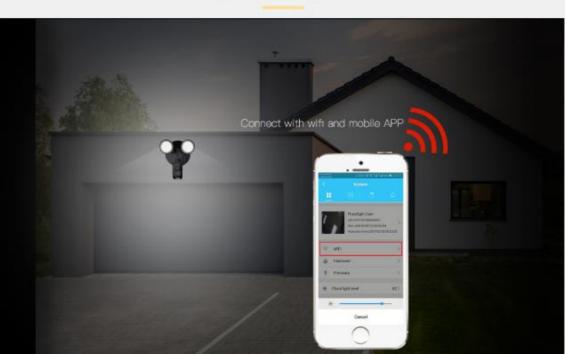



## Application

Mainly use for courtyard,gate,carport,protect your property.







## Floodlight Cam Specification (FC2)

Cotomore	Times	Devementaria
Category	Types	Parameters
System	Operation	Embedded Linux OS
Cystem	Online Visitor	Support 4 visitors at the same time
	Image Sensor	1/2.7 inch 1080p Progressive Scan CMOS Sensor
Image	Minimum Illumination	0.5Lux (color mode) ,0.1Lux (black and white mode)
Capture	Lens/ View Angle	3.0mm@F2.4/155°Diagonal
	Night Vision	Dual Filter,IR-Cut, 8 pcs IR LED, IR irradiation distance:10M
	Compression	H.264 main profile@level:4.0/Motion-JPEG
	standard	
	Three-Stream	Main Stream: 1080p (1920×1080) @15fps
Video		Sub Stream: 640*360@15fps
Video		Third Stream: 320*180@10fps
	Rate/Maximum	128~4096kbps/25fps
	Frame Rate	
	Image Adjustment	Contrast,Brightness,Saturation, Hue
	Input	Built in—38dB Microphone
	Output	Built in 8Ω 1W speaker
Audio	Sampling Frequency/	8KHz/16bit
Audio	Width	
	Compression	ADPCM/32kbps
	Standard /Rate	
	Protocols	TCP/IP,HTTP,TCP,UDP,DHCP,DNS,NTP,RTSP,P2P etc.
	Wireless LAN	wifi802.11 b/g/n
Network	Wireless Frequency	2.4~2.4835GHz
	Wireless security	64/128-bit WEP/WPA-PSK/WPA2-PSK data encryption
	encryption	
Storage	Memory Card	Support T-Flash card maximum 128GB
Alarm	Alarm Detection	Support Motion Detection
Physical	Input Voltage	110V~240V
Environm	Power	35W
ent	Operating Condition	Temperature: -10~50℃
LED Light	Light Source	2 pcs of white LED light (4000-4500K)
LED LIGHT	Lumen	2*800Lm
		Remote lighting control (on/off/brightness)
Function		2.Remote off alarm information
	l	3. Motion detection and alarm (push message to APP)





Shenzhen	VStarcam	Technology	Co., Ltd.

## Authorization Certificate

horize:

Sinseng Components Pte Ltd
As VStarcam's Distributor in Singapore
who shall have the rights to sell the VStarcam's smart home products
with VStarcam Brand.
Period: 1st, November, 2019 to 1st November 1, 2020
Authorized by

Shenzhen VStarcam Technology Co., 1td.

Issue date: 1", November, 2019

www.vstaream.com