



SINSENG COMPONENTS PTE LTD  
 10 Jalan Besar #01-11 Sim Lim Tower  
 Singapore 208787  
 Tel:6299 6868 Website:www.sinseng.com.sg

**HIKVISION**

**Full HD**  
**1080P**

**4K**  
 ULTRA HD

**DS-7204HQHI-K1**



  
**H.265+**

**4**  
**CH**

**1**  
**SATA**

**BNC**

**HDMI**

# HIKVISION

See Far, Go Further

## HIKVISION®

### TURBO HD DVR

### 7200 Series



- ▶ H.265(K-series) and H.264 video compression
- ▶ High Definition real-time recording
- ▶ Support Turbo HD video input
- ▶ Easy smart search for motion event during playback
- ▶ HDMI output at up to 4K resolution
- ▶ Live view from smart device or Internet
- ▶ Two-way audio
- ▶ Multi-channel synchronous playback



Product in box may vary in appearance and specifications.  
[www.hikvision.com](http://www.hikvision.com)

HDMI™



**HIKVISION**





**HIKVISION**



# HIKVISION

## Customize Motion Detection

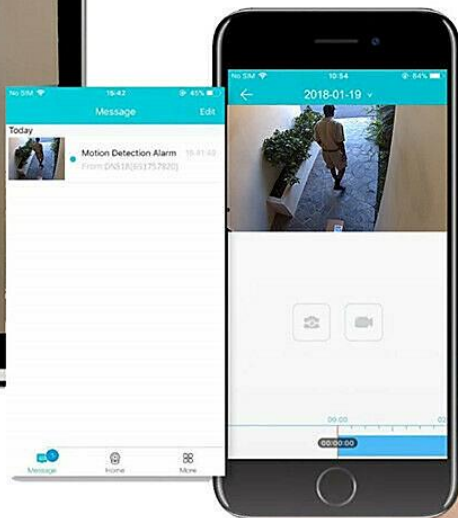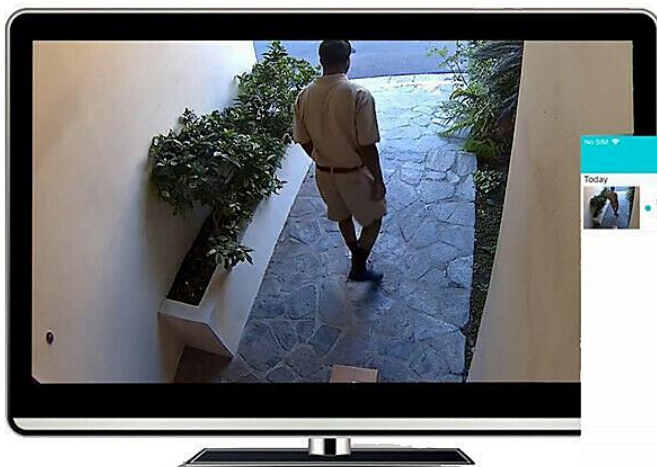

Customize  
Zones



Motion  
Record



E-mail  
Alert




Mobile  
Notification

# HIKVISION



# HIKVISION

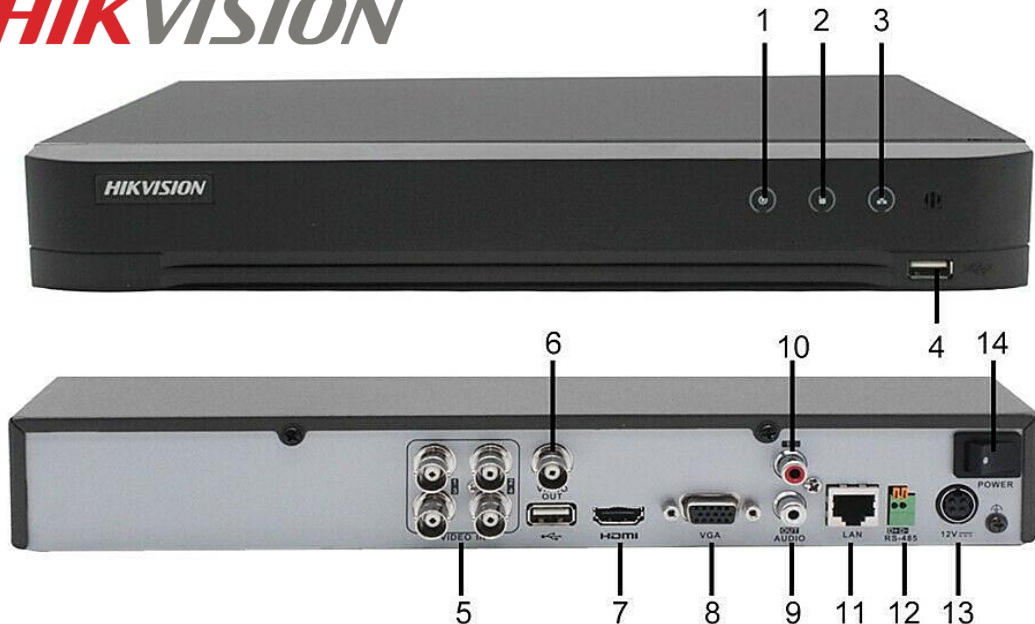


1. Power LED : Indicates if the DVR is powered on
2. Tx/Rx LED : Indicates if the Network is active
3. StatusLED: Indicates if the Hard Drive is working
4. USB Port : Connects to a USB mouse or flash drive
5. Video In : Connects cameras via BNC cables
6. Video Out
7. HDMI Port : Connects to HDTV or computer monitor
8. VGA Port : Connects to TV or computer monitor
9. Audio Out
10. Audio I/O: Connects an extra microphone/speaker (not included)
11. LAN : Connects to your router
12. RS485: Connects to PTZ camera
13. 12V : Connects the 12V DC Power Supply
14. Power : Power Switch

# HIKVISION

## Self-adaptive 5-in-1 DVR


You can freely enjoy five connection modes with this one multi-function digital video recorder. Analog, AHD, TVI, CVI as well as HD IP cameras are all connectable to it. This gives you the chance to take full advantage of your old cameras or even new ones.

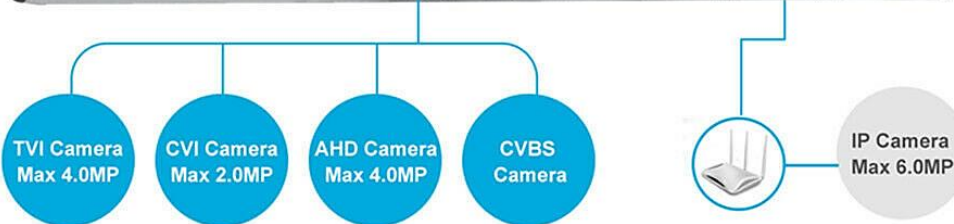

SCAN ME





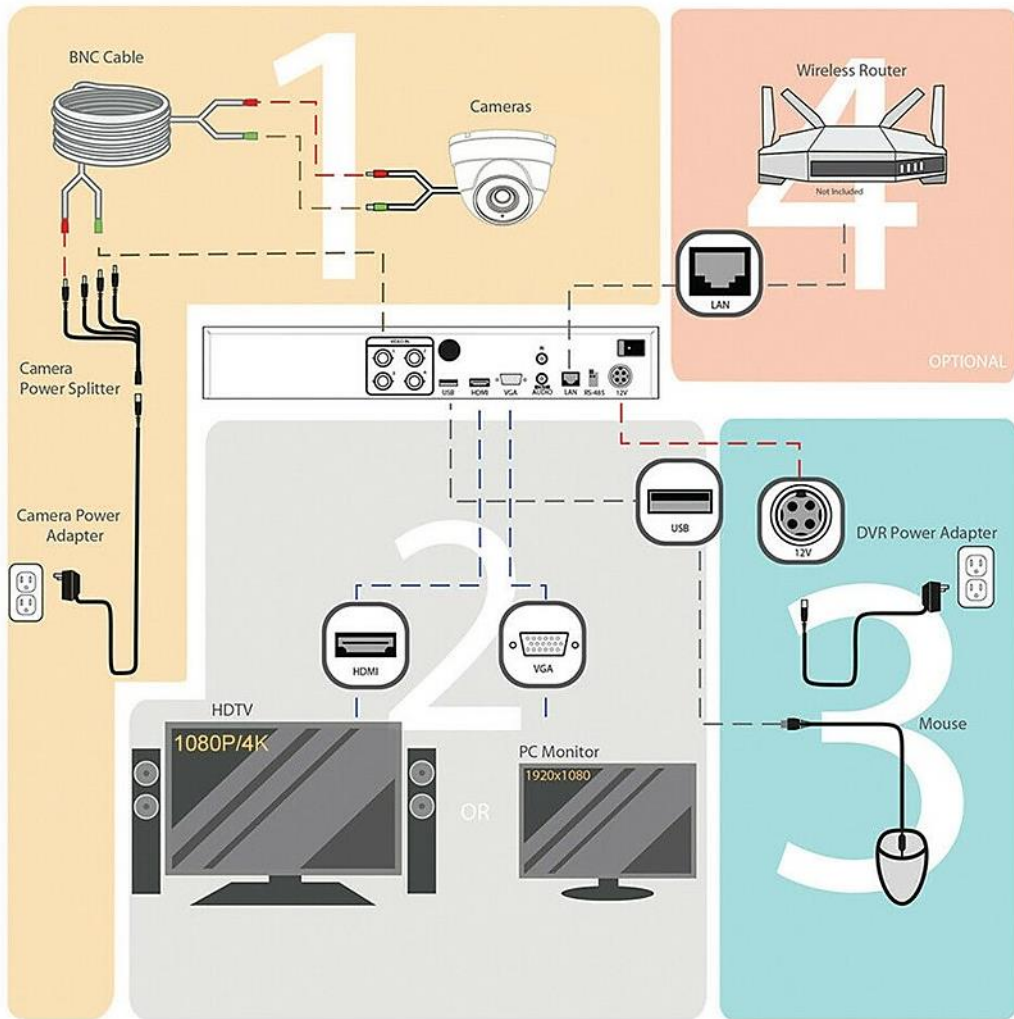

## DS-7200HQHI-K1 SERIES TURBO HD DVR

### Key Features

- Support H.265 Pro+/H.265 Pro/H.265 video compression
- Support HDTV/AHD/CVI/CVBS/IP video input
- Max. 6/12/24 IP cameras input (up to 6 MP)
- Max. 800 m for 1080p and 1200 m for 720p HDTV signal transmission
- Up to 10 TB capacity per HDD



### Compression and Recording

- H.265 Pro+ can be enabled to improve encoding efficiency and reduce data storage costs
- Full channel recording at up to 4 MP lite resolution

### Storage and Playback

- Smart search for efficient playback
- Support the third party cloud storage (Dropbox/Google Drive/Microsoft OneDrive)

### Smart Function

- Support multiple VCA (Video Content Analytics) events for both analog and smart IP cameras
- Support 4-ch line crossing detection and intrusion detection; DS-7216HQHI-K1 supports 1-ch sudden scene change detection

### Network & Ethernet Access

- Hik-Connect & DDNS (Dynamic Domain Name System) for easy network management
- Max. 24/48/96 Mbps incoming bandwidth and output bandwidth limit configurable




## Specifications

Model	DS-7204HQHI-K1	DS-7208HQHI-K1	DS-7216HQHI-K1
<b>Recording</b>			
Video compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264		
Encoding resolution	When 1080p lite mode is not enabled: 4 MP lite/3 MP/1080p/720p/VGA/WD1/4CIF/CIF When 1080p Lite mode is enabled: 4 MP lite/3 MP/1080p lite/720p lite/VGA/WD1/4CIF/CIF		
Frame rate	Main stream: When 1080p Lite mode not enabled: For 4 MP stream access: 4 MP lite@15fps; 1080p lite/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N) For 3 MP stream access: 3 MP/1080p/720p/VGA/WD1/4CIF/CIF@15fps For 1080p stream access: 1080p/720p@15fps; VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) For 720p stream access: 720p/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) When 1080p Lite mode enabled: 4 MP lite/3 MP@15fps; 1080p lite/720p lite/VGA/WD1/4CIF/CIF@25fps (P)/30fps (N) Sub-stream: WD1/4CIF@12fps; CIF@25fps (P)/30fps (N)		
Video bit rate	32 Kbps to 6 Mbps		
Dual stream	Support		
Stream type	Video, Video & Audio		
Audio compression	G.711u		
Audio bit rate	64 Kbps		
<b>Video and Audio</b>			
IP video input	2-ch (up to 6-ch)	4-ch (up to 12-ch)	8-ch (up to 24-ch)
	Up to 6 MP resolution		
	Support H.265+/H.265/H.264+/H.264 IP cameras		
Analog video input	4-ch	8-ch	16-ch
	BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection		
HDTVI input	4 MP, 3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25 *: The 3 MP signal input is only available for channel 1 of DS-7204HQHI-K1, for channel 1/2 of DS-7208HQHI-K1, and for channel 1/2/3/4 of DS-7216HQHI-K1.		
AHD input	4 MP, 1080p25, 1080p30, 720p25, 720p30		
HDCVI input	1080p25, 1080p30, 720p25, 720p30		
CVBS input	PAL/NTSC		
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480		

<b>HDMI/VGA output</b>	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		<b>VGA:</b> 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz <b>HDMI:</b> 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
<b>Audio input</b>	1-ch, RCA (2.0 Vp-p, 1 KΩ)		
<b>Audio output</b>	1-ch, RCA (Linear, 1 KΩ)		
<b>Two-way audio</b>	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the first audio input)		
<b>Synchronous playback</b>	4-ch	8-ch	16-ch
<b>Network</b>			
<b>Remote connections</b>	32	64	128
<b>Network protocols</b>	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF		
<b>Network interface</b>	1, RJ45 10M/100M self-adaptive Ethernet interface		1, RJ45 10M/100M/1000M self-adaptive Ethernet interface
<b>Auxiliary interface</b>			
<b>SATA</b>	1 SATA interface		
<b>Capacity</b>	Up to 10 TB capacity for each disk		
<b>Serial interface</b>	RS-485 (half-duplex)		
<b>USB interface</b>	2 × USB 2.0		Front panel: 1 × USB 2.0 Rear panel: 1 × USB 3.0
<b>Alarm in/out</b>	N/A		
<b>General</b>			
<b>Power supply</b>	12 VDC		
<b>Consumption (without HDD)</b>	≤ 6 W	≤ 7.5 W	≤ 25 W
<b>Working temperature</b>	-10 °C to +55 °C (+14 °F to +131 °F)		
<b>Working humidity</b>	10% to 90%		
<b>Dimensions (W × D × H)</b>	315 × 242 × 45 mm (12.4 × 9.5 × 1.8 inch)		
<b>Weights (without HDD)</b>	≤ 1.16 kg (2.6 lb)	≤ 1.78 kg (3.9 lb)	≤ 2 kg (4.4 lb)

## Physical Interfaces

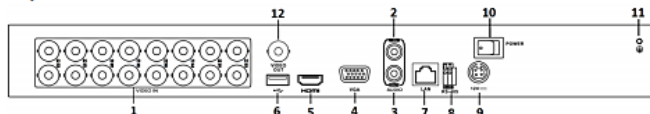

\*: The rear panel of DS-7204/7208HQHI-K1 provides 4/8 video input interfaces.

No.	Description	No.	Description
1	VIDEO IN	7	LAN Network Interface
2	AUDIO IN, RCA Connector	8	RS-485 Serial Interface
3	AUDIO OUT, RCA Connector	9	Power Input
4	VGA Interface	10	Power Switch
5	HDMI Interface	11	GND
6	USB Interface	12	VIDEO OUT

## Available Models

DS-7204HQHI-K1, DS-7208HQHI-K1, DS-7216HQHI-K1

Distributed by



## HIKVISION®

### Headquarters

No.555 Gnanou Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-88071588  
overseasbusiness@hikvision.com

Hikvision USA  
T +1-909-895-0400  
sales.usa@hikvision.com

Hikvision Australia  
T +61-2-8939-4233  
sales.au@hikvision.com

Hikvision India  
T +91-22-29469000  
sales@pramahikvision.com

Hikvision Canada  
T +1-866-200-8600  
sales.canada@hikvision.com

Hikvision Thailand  
T +662-275-8949  
sales.thailand@hikvision.com

Hikvision Europe  
T +31-23-5542770  
sales.eu@hikvision.com

Hikvision Italy  
T +39-0438-49620  
info.it@hikvision.com

Hikvision Brazil  
T +55 11 3338-0050  
Latam.support@hikvision.com

Hikvision Turkey  
T +90 216521 7070- 7074  
sales.tr@hikvision.com

Hikvision Malaysia  
T +601-7552-7433  
sales.my@hikvision.com

Hikvision UK & Ireland  
T +01628-902140  
sales.uk@hikvision.com

Hikvision South Africa  
Tel: +27 110 0361172  
sales.africa@hikvision.com

Hikvision France  
T +33(0)1-85-330-050  
info.fr@hikvision.com

Hikvision Kazakhstan  
T +7-727-8730867  
russia.particle@hikvision.ru

Hikvision Vietnam  
T +84-074273888  
sales.vt@hikvision.com

Hikvision UAE  
T +971-4-4432050  
sales.me@hikvision.com

Hikvision Singapore  
T +65-6688-4738  
sg@hikvision.com

Hikvision Spain  
T +34-91-737-16-55  
info.es@hikvision.com

Hikvision Tashkent  
T +99-87-1238-9438  
ucl@hikvision.ru

Hikvision Hong Kong  
T +852-2151-1761  
info.hk@hikvision.com

Hikvision Russia  
T +7-65-068-67-99  
salaru@hikvision.com

Hikvision Korea  
T +82-0131-731-9817  
sales.korea@hikvision.com

Hikvision Poland  
T +48-22-460-01-50  
info.pl@hikvision.com

Hikvision Indonesia  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

Hikvision Colombia  
sales.colombia@hikvision.com