1080P WiFi Infrared IP Surveillance Camera Wireless 2MP CCTV Night Vision Pan Tilt cam remote view



Feature

Support ONVIF Protocol

P2P encryption, Easier to set up WiFi and viewing in Moblile.

High Definition, H.264 2.0 Megapixel, 1080P.

Support up to 64G TF card memory, 24-hour recording.

Built-in IR-CUT, no color no cast. 10 pcs IR LEDS, 15m Night Vision

Pan:355°, Tilt: 100°

Built in Microphone & Speaker, 2 way audio, excellent cavity design, loud

intercom.

Support WiFi/ DDNS. PC/APP to control multi-cameras.

4-Channel view, support up to 5 online users viewing viewing on line at the same

WIPS820

time.


Motion dectection, Massage alert, FTP upload

Multi-language; Support Firefox, Safari, Google browser

Specification

| Sensor 1/4 color CMOS sensor Display resolution 1920*1080 Camera lens f:4mm, F:2.0 Min. Illumination 0.5Lux Built-in MIC and SPEAKER, enables two ways voice intercom Audio compression AAC AAC Lighting frequency 50Hz,60Hz Image Frame Rate 25fps Image adjustment Brightness,contrast,saturation and sharpness adjustable White balance,BLC Auto Night Vision 10 infrared light,irradiation distance:15m Wireless network WIFI(IEEE802.11b/g/n), external wireless antenna Network Support IP Add Static and Dynamic IP address Alarm detector Motion detection Alarm Linkage Support for camera,audio/video recording Power DC 5V/2.0A Button Reset button,a 1010FN function key Network interface External wireless antenna PTZ rotation angle Horizontal:350 degree & Vertical:100 degree Video storage Micro SD card local storage Dimension Size(LxWxH) 95(L)x100(W)x130mm(H) Weight S00g POWENT SIZE(LxWxH) S00g SIZE | | | |
|---|-----------------|------------------------|---|
| Camera lens f:4mm, F:2.0 Min. Illumination 0.5Lux Built-in MIC and SPEAKER, enables two ways voice intercom Audio compression AAC Video compression H.264 Lighting frequency 50Hz,60Hz Image Frame Rate 25fps Image adjustment Brightness,contrast,saturation and sharpness adjustable White balance,BLC Auto Night Vision 10 infrared light,irradiation distance:15m Wireless network WIFI(IEEE802.11b/g/n), external wireless antenna Network Support IP Add Static and Dynamic IP address Alarm Alarm detector Motion detection Alarm Linkage Support for camera,audio/video recording Power DC 5V/2.0A Button Reset button,a 1010FN function key Network interface 10/100Mbps adaptive RJ-45 interface WIFI antenna interface External wireless antenna Others Others Dimension Size(LxWxH) 95(L)x100(W)x130mm(H) | Image Sensor | Sensor | 1/4 color CMOS sensor |
| Camera lens f:4mm, F:2.0 Min. Illumination 0.5Lux Unput/output Built-in MIC and SPEAKER, enables two ways voice intercom Audio compression AAC Video compression H.264 Lighting frequency 50Hz,60Hz Image Frame Rate 25fps Image adjustment Brightness,contrast,saturation and sharpness adjustable White balance,BLC Auto Night Vision 10 infrared light,irradiation distance:15m Wireless network WIFI(IEEE802.11b/g/n), external wireless antenna Network Support IP Add Static and Dynamic IP address Alarm Alarm Linkage Support for camera,audio/video recording Power DC 5V/2.0A Button Reset button,a 1010FN function key Network interface 10/100Mbps adaptive RJ-45 interface WIFI antenna interface External wireless antenna Others Others Camera lens fi4mm, F:2.0 Built-in MIC and SPEAKER, enables two ways voice intercom AAC Wich and SPEAKER, enables two ways voice intercom AAC Wich and SPEAKER, enables two ways voice intercom AAC Wich and SPEAKER, enables two ways voice intercom AAC Wich and SPEAKER, enables two ways voice intercom AAC Wich and SPEAKER, enables two ways voice intercom AAC Wich and SPEAKER, enables two ways voice intercom AAC Wich and SPEAKER, enables two ways voice intercom AAC Wich and SPEAKER, enables two ways voice intercom AAC Wich and SPEAKER, enables two ways voice intercom AAC Wich and SPEAKER, enables two ways voice intercom AAC Wich and SPEAKER, enables two ways voice intercom AAC Wich and SPEAKER, enables two ways voice intercom AAC Wich and SPEAKER, enables two ways voice intercom AAC Wich and SPEAKER, enables two ways voice intercom AAC Wich and SPEAKER, enables two ways voice intercom AAC Wich and SPEAKER, enables two ways voice intercom AAC Wich and Self and | | Display resolution | 1920*1080 |
| Voice frequency | | Camera lens | f:4mm, F:2.0 |
| Video compression AAC Video compression H.264 Lighting frequency 50Hz,60Hz Image Frame Rate 25fps Image adjustment Brightness,contrast,saturation and sharpness adjustable White balance,BLC Auto Night Vision 10 infrared light,irradiation distance:15m Wireless network WIFI(IEEE802.11b/g/n), external wireless antenna Network Support IP Add Static and Dynamic IP address Alarm detector Motion detection Alarm Linkage Support for camera,audio/video recording Power DC 5V/2.0A Button Reset button,a 1010FN function key Network interface 10/100Mbps adaptive RJ-45 interface WIFI antenna interface External wireless antenna Others Others Size(LxWxH) 95(L)x100(W)x130mm(H) | | Min. Illumination | 0.5Lux |
| Video compression AAC Video compression H.264 Lighting frequency 50Hz,60Hz Image Frame Rate 25fps Image adjustment Brightness,contrast,saturation and sharpness adjustable White balance,BLC Auto Night Vision 10 infrared light,irradiation distance:15m Wireless network WIFI(IEEE802.11b/g/n), external wireless antenna Network Support IP Add Static and Dynamic IP address Alarm Alarm Linkage Support for camera,audio/video recording Power DC 5V/2.0A Button Reset button,a 1010FN function key Network interface 10/100Mbps adaptive RJ-45 interface WIFI antenna interface External wireless antenna Others PTZ rotation angle Horizontal:350 degree & Vertical:100 degree Video storage Micro SD card local storage Dimension Size(LxWxH) 95(L)x100(W)x130mm(H) | Voice frequency | Input/output | Built-in MIC and SPEAKER, |
| Video compression Lighting frequency Image Frame Rate Image adjustment White balance,BLC Night Vision Vireless network Alarm Alarm Interface Power Button Reset button,a 1010FN function key Network interface WiFI antenna interface Video storage Dimension Video compression H.264 Lighting frequency 50Hz,60Hz Brightness,contrast,saturation and sharpness adjustable Wight Vision 10 infrared light,irradiation distance:15m WiFI(IEEE802.11b/g/n), external wireless antenna Network Network VIFI(IEEE802.11b/g/n), external wireless antenna Network Alarm detector Motion detection Alarm Linkage Support for camera,audio/video recording DC 5V/2.0A Button Reset button,a 1010FN function key Network interface WiFI antenna interface External wireless antenna PTZ rotation angle Horizontal:350 degree & Vertical:100 degree Video storage Size(LxWxH) Size(LxWxH) Size(LxWxH) Sollarion Horizontal:350mm(H) | | | enables two ways voice intercom |
| Video Lighting frequency Image Frame Rate 25fps Image adjustment White balance,BLC Night Vision Vireless network Alarm Alarm Alarm Interface Power Button Network interface WIFI (Description of the single frequency) Network interface WIFI (Description of the single frequency) Network interface Wireless network Alarm Linkage Power DC 5V/2.0A Button Reset button,a 1010FN function key Network interface WIFI antenna interface External wireless antenna PTZ rotation angle Video storage Micro SD card local storage Size(LxWxH) 95(L)x100(W)x130mm(H) | | Audio compression | AAC |
| Video Image Frame Rate Image adjustment Brightness,contrast,saturation and sharpness adjustable White balance,BLC Night Vision 10 infrared light,irradiation distance:15m Wireless network WiFI(IEEE802.11b/g/n), external wireless antenna Network Support IP Add Static and Dynamic IP address Alarm Alarm Alarm detector Alarm Linkage Support for camera,audio/video recording Power DC 5V/2.0A Button Reset button,a 1010FN function key Network interface 10/100Mbps adaptive RJ-45 interface WiFI antenna interface External wireless antenna PTZ rotation angle Horizontal:350 degree & Vertical:100 degree Video storage Micro SD card local storage Dimension Size(LxwxH) 95(L)x100(W)x130mm(H) | Video | Video compression | H.264 ★ |
| Image adjustment White balance,BLC Night Vision Wireless network Alarm Alarm Alarm Alarm Linkage Power DC 5V/2.0A Button Reset button,a 1010FN function key Network interface WIFI antenna interface VIFI antenna interface VIFI antenna interface Video storage Dimension Brightness,contrast,saturation and sharpness adjustable Auto Auto Auto Nuto Wireless network WIFI (IEEE802.11b/g/n), external wireless antenna VIFI (IEEE802.11b/g/n), external wireless antenna VIFI (IEEE802.11b/g/n), external wireless antenna Network Interface Motion detection Motion detection Alarm Linkage Support for camera,audio/video recording DC 5V/2.0A Reset button,a 1010FN function key Network interface External wireless antenna Horizontal:350 degree & Vertical:100 degree Video storage Video storage Size(LxWxH) P5(L)x100(W)x130mm(H) | | Lighting frequency | 50Hz,60Hz |
| Image adjustment White balance,BLC Night Vision Wireless network Alarm Alarm Alarm Alarm Linkage Power Button Network interface WiFI antenna interface Video storage Dimension Brightness,contrast,saturation and sharpness adjustable Auto Auto Auto Nuto WiFI (IEEE802.11b/g/n), external wireless antenna VWIFI (IEEE802.11b/g/n), external wireless antenna WiFI (IEEE802.11b/g/n), external wireless antenna WiFI (IEEE802.11b/g/n), external wireless antenna Motion detection Motion detection Support for camera,audio/video recording Power DC 5V/2.0A Reset button,a 1010FN function key 10/100Mbps adaptive RJ-45 interface WIFI antenna interface WiFI antenna interface Wicro SD card local storage Size(LxWxH) Size(LxWxH) 95(L)x100(W)x130mm(H) | | Image Frame Rate | 25fps * |
| Night Vision 10 infrared light,irradiation distance:15m Wireless network WIFI(IEEE802.11b/g/n), external wireless antenna Network Support IP Add Static and Dynamic IP address Alarm detector Motion detection Alarm Linkage Support for camera,audio/video recording Power DC 5V/2.0A Button Reset button,a 1010FN function key Network interface 10/100Mbps adaptive RJ-45 interface WIFI antenna interface External wireless antenna Others PTZ rotation angle Horizontal:350 degree & Vertical:100 degree Video storage Micro SD card local storage Size(LxWxH) 95(L)x100(W)x130mm(H) | | Image adjustment | Brightness, contrast, saturation and sharpness adjustable |
| Wireless network WIFI(IEEE802.11b/g/n), external wireless antenna | | White balance,BLC | Auto |
| Network Alarm detector Alarm Linkage Power DC 5V/2.0A Button Network interface WIFI antenna interface Dthers Dimension Support IP Add Static and Dynamic IP address Motion detection Motion detection Motion detection Support for camera,audio/video recording DC 5V/2.0A Reset button,a 1010FN function key 10/100Mbps adaptive RJ-45 interface External wireless antenna PTZ rotation angle Wideo storage Micro SD card local storage Size(LxWxH) 95(L)x100(W)x130mm(H) | | Night Vision | 10 infrared light, irradiation distance: 15m |
| Alarm detector Alarm Linkage Power DC 5V/2.0A Button Reset button,a 1010FN function key Network interface WIFI antenna interface PTZ rotation angle Video storage Dimension Motion detection Motion detection Motion detection Support for camera,audio/video recording DC 5V/2.0A Reset button,a 1010FN function key 10/100Mbps adaptive RJ-45 interface External wireless antenna Horizontal:350 degree & Vertical:100 degree Video storage Micro SD card local storage Size(LxWxH) 95(L)x100(W)x130mm(H) | | Wireless network | WIFI(IEEE802.11b/g/n), external wireless antenna |
| Alarm Linkage Support for camera,audio/video recording Power DC 5V/2.0A Button Reset button,a 1010FN function key Network interface 10/100Mbps adaptive RJ-45 interface WIFI antenna interface External wireless antenna Others PTZ rotation angle Horizontal:350 degree & Vertical:100 degree Video storage Micro SD card local storage Size(LxWxH) 95(L)x100(W)x130mm(H) | Network | Support IP Add | Static and Dynamic IP address |
| Alarm Linkage Support for camera,audio/video recording Power DC 5V/2.0A Button Reset button,a 1010FN function key Network interface 10/100Mbps adaptive RJ-45 interface WIFI antenna interface External wireless antenna PTZ rotation angle Horizontal:350 degree & Vertical:100 degree Video storage Micro SD card local storage Size(LxWxH) 95(L)x100(W)x130mm(H) | Alarm | Alarm detector | Motion detection |
| Interface Button Reset button,a 1010FN function key | | Alarm Linkage | Support for camera, audio/video recording |
| Network interface 10/100Mbps adaptive RJ-45 interface WIFI antenna interface External wireless antenna Others PTZ rotation angle Horizontal:350 degree & Vertical:100 degree Video storage Micro SD card local storage Size(LxWxH) 95(L)x100(W)x130mm(H) | Interface | Power | DC 5V/2.0A |
| Network interface 10/100Mbps adaptive RJ-45 interface WIFI antenna interface External wireless antenna Others PTZ rotation angle Horizontal:350 degree & Vertical:100 degree Video storage Micro SD card local storage Size(LxWxH) 95(L)x100(W)x130mm(H) | | Button | Reset button,a 1010FN function key |
| Others PTZ rotation angle Horizontal:350 degree & Vertical:100 degree Video storage Micro SD card local storage Size(LxWxH) 95(L)x100(W)x130mm(H) | | Network interface | 10/100Mbps adaptive RJ-45 interface |
| Video storage Micro SD card local storage Size(LxWxH) 95(L)x100(W)x130mm(H) | | WIFI antenna interface | External wireless antenna |
| Video storage Micro SD card local storage Size(LxWxH) 95(L)x100(W)x130mm(H) | Others | PTZ rotation angle | Horizontal:350 degree & Vertical:100 degree |
| Dimension | | Video storage | Micro SD card local storage |
| Weight 500g | Dimension | Size(LxWxH) | 95(L)x100(W)x130mm(H) |
| | | Weight | 500g |



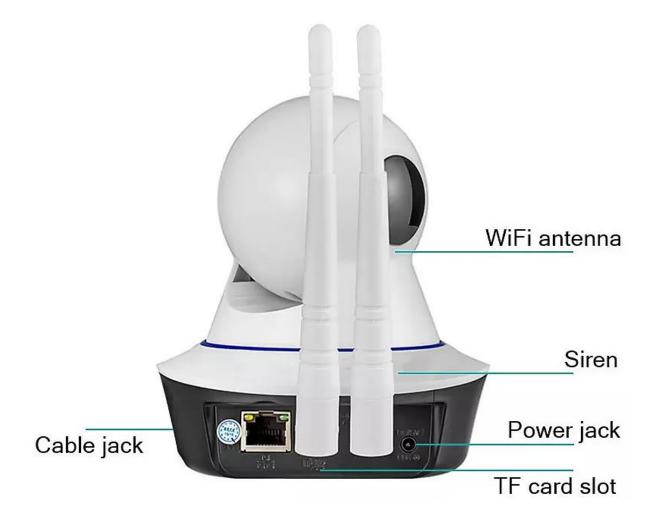



APP Remote Control














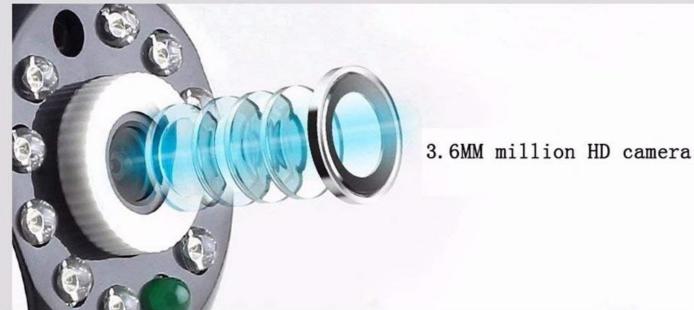





Support two-way voice intercom

Built-in pickups, speakers. Using H.264 video compression algorithm saves a lot of Flow, achieve high definition image transmission, clear voice intercom effect, no electricity



Gimbal

Rotate Rotate the handle can be adjusted easily Stent use random (Wall mounted, countertop display, ceiling)





The bottom anti-slip stickers

3 non-slip slide down the post to prevent the camera from your desktopFurther protect the camera.

Bottom mounting screw holes

Pure copper material, to prevent rust.

The reset button



Lens correction

By rotating the lens can Achieve focus, making the picture clearer.



Before focusing



After focusing



The level of The angle of rotation 355 °

Support Android/BIAackberry/iphone ect. Real- time monitoring at any time any where by tablet , PC , mobile phone .Scan the botton QR code to add , Easy ,fast and convenient .



code to add, Easy, fast and convenient.



Alarm email

If the family out, the network cameras can also help you take care of the house . If someone hacked or home accidentally caught fire, the camera will immediately alert while snapping pictures and pictures sent to you via email at the first time so that you could know the events happening at home





7-STAR*

(1)Download APP











(2)Register & log in



(3)Add Device



(4)Choose AP Connection



(5)Set Password



(6)Choose Device

| youse. | 704 |
|--|--------------|
| Click here now to return to APP | |
| WLAN | |
| GW,AP,8850929 Security Recommendation | ♥ (1) |
| HOOSE A NETWORK | |
| 360 | • • (1) |
| A_M3_2.40 | (|
| and-Business | * (I) |
| chungmi-camera-siactos_mispCF36 | * ① |
| омос | • 🕶 🛈 |
| CMCC-FREE | * (1) |
| CMCC-WEB | * (1) |
| DUNK,AFTABO | * (1) |
| FAST_F01774 | (1) |
| GW,12M, 2.4G | (|
| GW,13M,5G 3.4.3 | (1) |
| HP-Print-GD-LaserJet Pro MEP | * 0 |

(8)Set Wifi



(9) Connecting





1x WiFi IP Camera
1x Adaptor 5V (1.35mm)
1x Bracket

